


C Frame Hydraulic Press



- Rigid body and ram
- Cushion unit
- User friendly ram adjustment
- Main cylinder and cushion unit pressure adjustment
- Certified hydraulic power unit
- Ergonomic design
- Compliance with 2006-42 machinery directives

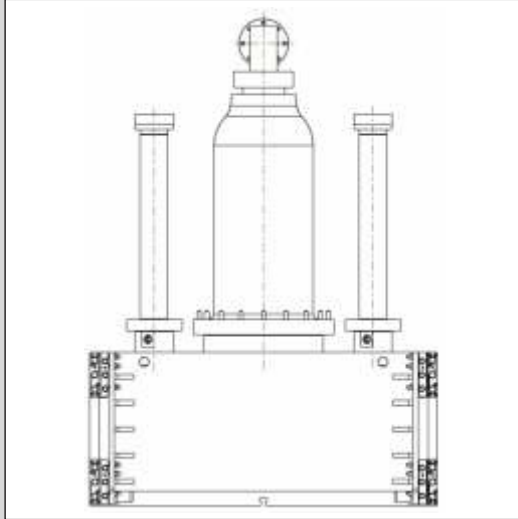

Technical Specifications

Properties	Unit	CDHC 630-400-250	CDHC 1000-400-400	CDHC 1600-400-630
Capacity	tons	63	100	160
Cushion unit capacity	tons	25	40	63
Stroke	mm	400	400	400
Cushion unit stroke	mm	150	150	150
Table dimension	mm	750 x 625	850x640	1000x750
Max. table ram distance	mm	630	685	765
Ram dimension	mm	750 x 570	850x630	1000x680
Rapid approach speed	sc	300	250	250
Work speed	sc	10-25	10-20	10-20
Press height (~)	mm	1150	1400	1460
Press depth (~)	mm	3170	3565	3900
Press width (~)	mm	1710	2030	2400
Motor power	kW	7,5	11	22
Die loading apparatus	-	Optional	Optional	Optional
Centralized lubrication system	-	Automatic Grease	Motorlu Otomatik Gres	Motorlu Otomatik Gres
Safety guard system	-	Photocell	Photocell	Photocell
Cushion unit	-	Standard	Standard	Standard