


H Frame Hydraulic Press



- Rigid body and ram
- User friendly ram adjustment
- Cushion unit
- Main cylinder and cushion unit pressure adjustment
- Certified hydraulic power unit
- Ergonomic design
- Compliance with 2006-42 machinery directives

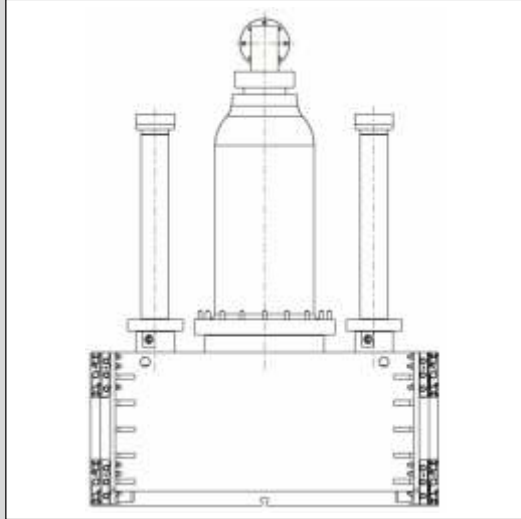

Technical Specifications

Properties	Unit	CDHH 2500-700-800	CDHH 3000-800-800	CDHH 4000-800-1250	CDHH 5000-900-1750
Capacity	tons	250	300	400	500
Cushion unit capacity	tons	80	80	1250	175
Stroke	mm	700	800	800	900
Cushion unit stroke	mm	225	330	350	400
Table dimension	mm	1400x1100	1500x1200	1600x1300	1600x1300
Max. table ram distance	mm	1140	1100	1500	1500
Rapid approach speed	sc	200	200	200	200
Work speed	sc	10-20	10-20	10-20	10-20
Press height (~)	mm	2700	3050	4130	4130
Press depth (~)	mm	5250	5210	6500	6500
Press width (~)	mm	2150	1720	3000	3000
Die loading apparatus	-	Optional	Optional	Optional	Optional
Centralized lubrication system	-	Automatic Grease	Automatic Grease	Automatic Grease	Automatic Grease
Safety guard system	-	Photocell	Photocell	Photocell	Photocell
Cushion unit	-	Standard	Standard	Standard	Standard