


SL 2000T2Y2

MULTI AXIS TURNING CENTER



SL 2000T2Y2 Twin Spindle and Turrets for High Productivity

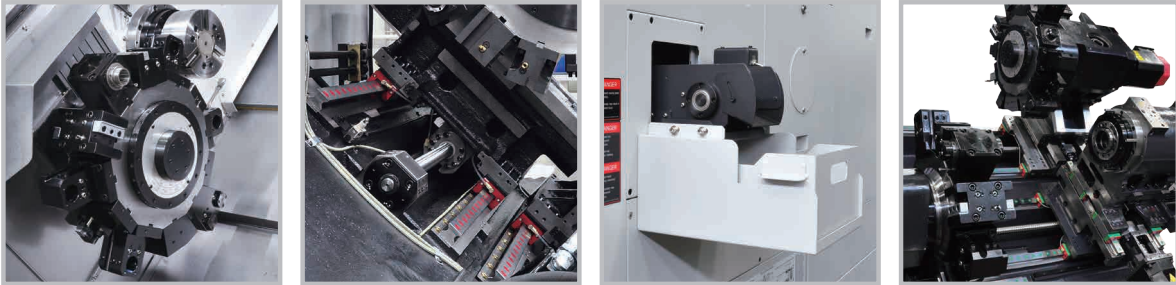

Upper and lower turrets are high-speed, highly-reliable servo drive turrets with up to 32 tool stations, enabling high-speed, high-precision machining of complicated parts with single setup.

Major Specifications

DESCRIPTION		SL 2000T2Y2
Swing over the bed		mm 230
Max. turning diameter [Upper / Lower]×length		mm [230 / 230]×662
Spindle speed		rpm 5,000
Spindle nose		ASA A2-6
Main spindle motor [Sub spindle motor] (Max./Cont.)		kW 18.5/22 [18.5/22]
Rapid traverse	X1/X2/Xe	m/min 24
	Y1/Y2	m/min 10
	Z1/Z2/W[Z3]	m/min 40
Axis travel	X1/X2/Xe	mm 217.5/167.5/120
	Y1/Y2	mm 105(±52.5)/105(±52.5)
	Z1/Z2/W[Z3]	mm 710/710/720
Machine weight		kgf 10,000
Required floor space (L×W)		mm 4,250×2,180
Controller		Fanuc Series