


SLV 800(RH,LH) / 800M(RH,LH)

VERTICAL LATHE

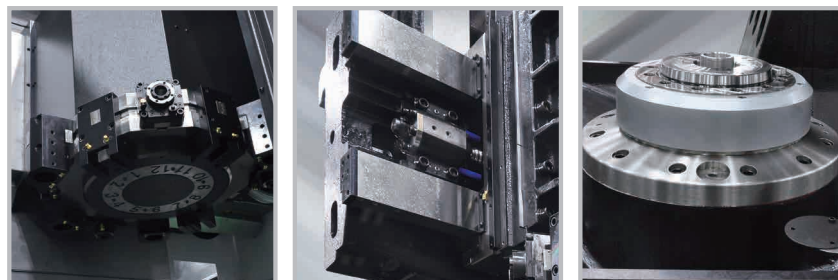

SLV 800

SLV 800V is a heavy duty, ultra precision turning center, box way design, 2 step gear box, servo driven turret adopted.



- 2 Step Gear box (Opt.)
- High rigidity Box type column

Major Specifications

[] : Option

DESCRIPTION		SLV 800(RH,LH)	SLV 800M(RH,LH)
Chuck size	inch	A Type:18", B Type:21", C Type:24"	A Type:18", B Type:21", C Type:24"
Swing over the bed	mm	890	890
Max. turning diameter×length	mm	810×800	810×775
Spindle speed	rpm	2,000	2,000
Spindle nose	ASA	A2-11	A2-11
Main spindle motor(cont./30min)	kW	22/30 [30/37]	22/30 [30/37]
Rapid traverse (X/Z)	m/min	20/20	20/20
Axis travel (X/Z)	mm	430/800	430/800
Number of tool positions	ea	12	12/BMT75
OD tool Shank size	mm	32×32	32×32
Boring bar diameter	mm	63	63
Machine weight	kgf	11,000	11,200
Required floor space (L×W)	mm	2,052×3,499	2,052×3,499
Controller		Fanuc Series	