

# PCV 430/460

LM GUIDE TYPE  
VERTICAL MACHINING CENTER



**SMEC Co., Ltd.**

157-10, Goldenroot-ro, Juchon-myeon, Gimhae-si,  
Gyeongsangnam-do, Korea  
Tel +82 55 340 4800 / Fax +82 55 340 4740  
[www.esmec.com](http://www.esmec.com)



**PCV Series**

- | PCV 430
- | PCV 460



# PCV Series

## PCV 430/460

Offering high speed, high precision machining in a compact design with the best in class performance to cost ratio.

- Easy to use and easy to maintain design
- highly rigid, single piece bed designed for low center of gravity
- widest in class Roller Type LM Guide saddle to prevent overhang
- high speed, high rigidity direct-coupled spindle

		PCV 430	PCV 460
Travel (X/Y/Z)	mm	700/430/510	700/460/510
Table size	mm	750 x 420	750 x 420
Table loading capacity	kgf	560	560
Table surface	mm	18H8 × p125 × 3ea	18H8 × p125 × 3ea
Max. spindle speed	rpm	10,000	15,000
Tool-to-tool time	sec	1.3	1.3
Rapid traverse (X/Y/Z)	mm	48/48/36	48/48/36
Tool storage capacity	EA	24	24

### High Efficiency

Enhanced high-speed machining significantly reducing non-cutting time

### High Rigidity

Ensuring customer satisfaction and trust with high precision, high quality machining

### Economic


Best cost effective solution with best performance to cost

### Efficient Machining

Most compact in class design for greatest machining efficiency

## High efficiency


Rapid traverse (X/Y/Z axis)  
**48/48/36** m/min

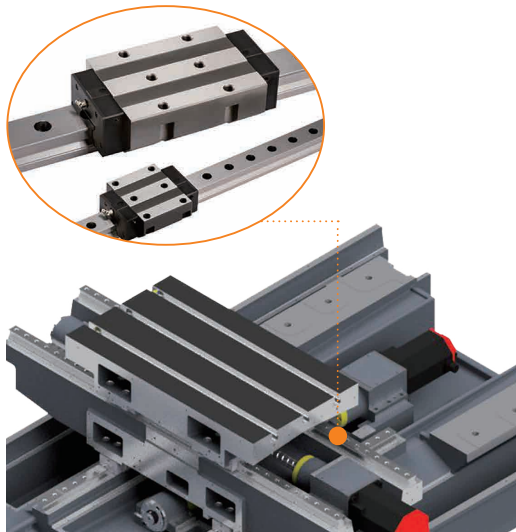

### Roller type LM guide way


Highly responsive Roller Type LM Guideways offer superior rapid traverse speeds, reducing non-cutting time while minimizing noise during operation.

- high speed, high rigidity, enhanced durability
- compared to Ball Type LM Guides, it offers improved wear resistance, precision travel and product lifetime

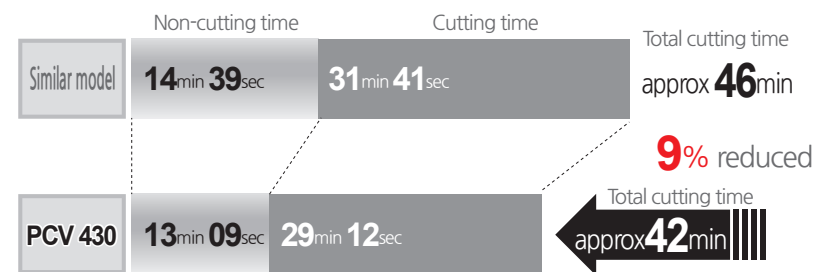

※ The above data is based on internal testing. Values may change depending on cutting conditions.

## Rigidity

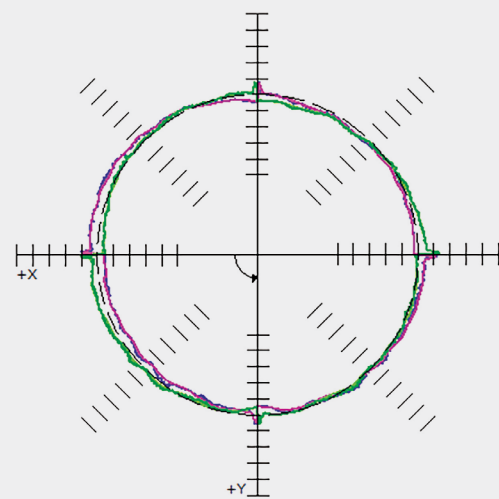

High precision design offers high precision cutting quality

- highly rigid, single piece bed design for low center of gravity
- widest in class Roller Type LM Guide saddle to prevent overhang
- high speed, high rigidity direct-coupled spindle

Roundness

**4.5 $\mu$ m**

Feedrate

**1,000**mm/min

## Economic

**Cost Down**



Similar model PCV 430

**Quality Up**




Similar model PCV 430

**"12% more cost effective than similar model"**

By optimizing performance compared to its cost, it offers the most cost effectiveness in its class with its enhanced cost efficiency.

## Space Efficiency

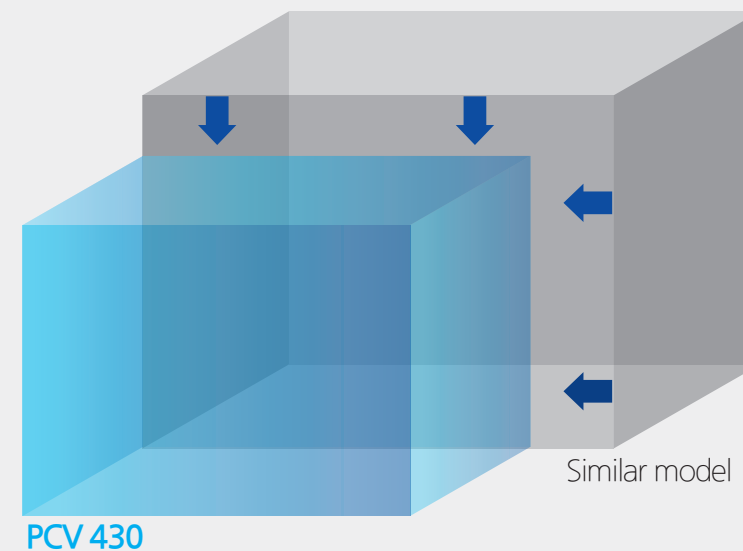

PCV 430


Similar model

**"14% more space efficient than similar model"**


### Compact design

- minimized installation footprint with compact design
- effective chip discharge design
- centralized OP panel for operator convenience
- more units can be installed in the same factory floorspace

Machine Design

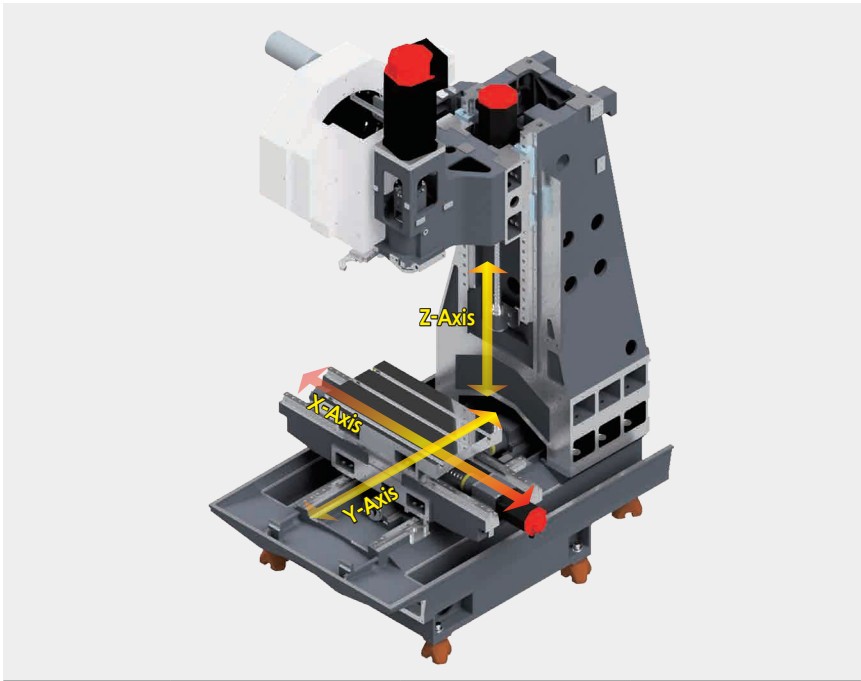

Model	Travel(mm)		
	X-axis	Y-axis	Z-axis
PCV 430	700	430	510
PCV 460	700	460	510

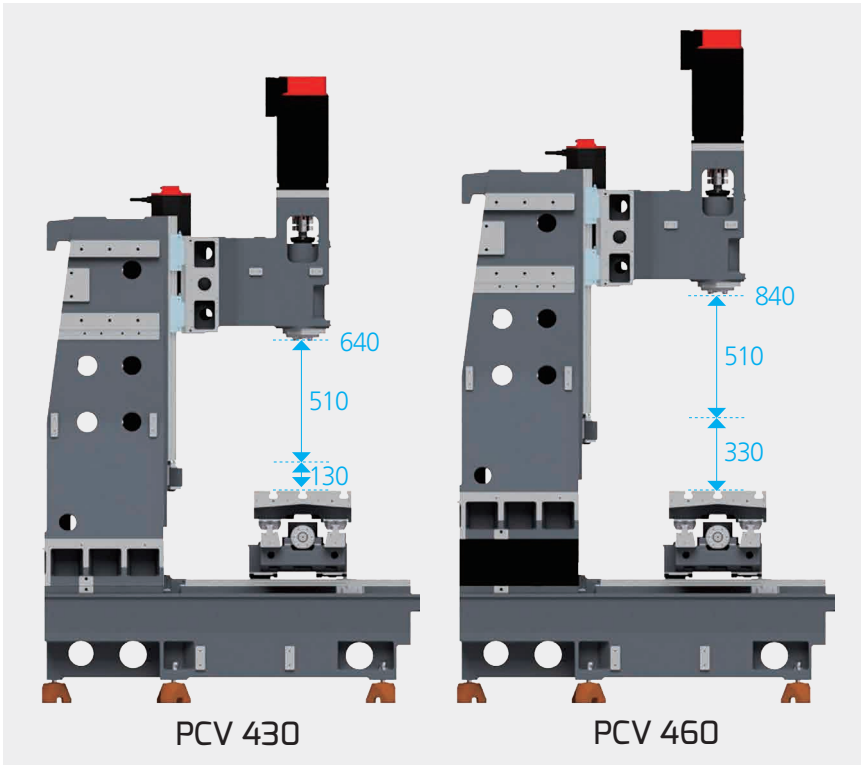

Direct-coupled spindle for high speed, high precision  
Through-spindle coolant (TSC) ready head assy design with TSC ready spindle and TSC coolant unit.

Z-axis column & headstock

Highly rigid column and wide guideway span, ensures high spindle rigidity during heavy machining

X-axis saddle & table

Saddle with wide guideway span enables highly rigid machining over long periods of time

Bed & saddle


Highly rigid, single-piece bed designed for low-center of gravity with widest in class saddle span to prevent overhang

Spindle to table-top distance

PCV 430  
130 ~ 640 mm

PCV 460  
330 ~ 840 mm

Spindle

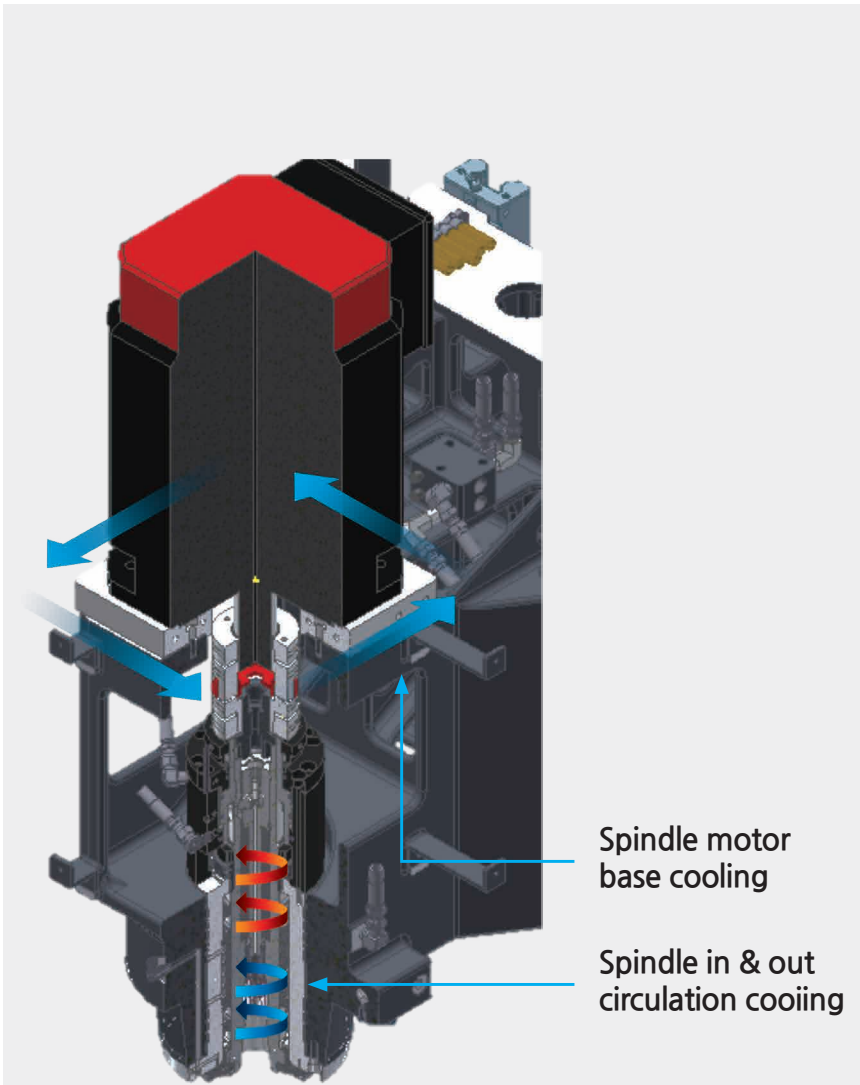

JACKET Circulation Cooling

Semi-permanent grease lubrication applied to the bearings, while thermal growth is minimized using jacket circulation cooling around the bearing housing (a source of heat) via a Fan Cooler, ensuring stable performance and extending the lifetime of the spindle.

The ultra precision spindle is supported by 4 rows of P4 class high-speed angular bearings allowing high speed, high precision machining with the direct-coupled head that minimizes thermal growth through forced heat dissipation.

10,000rpm Motor

Spindle Power(Cont/Max)  
11/20.4kW

Spindle Torque(Cont/Max)  
52.5/130N·m

※PCV 430 standard specifications

15,000rpm Motor

Spindle Power(Cont/Max)  
11/15kW

Spindle Torque(Cont/Max)  
57.3/119N·m

※PCV 430 standard specifications



ATC / Magazine



ATC Magazine

Designed with a standard 24 tool magazine with short travel distance to enable quick tool changes

Fast and errorless tool changes are made possible using the memory random technique and double arm type tool changer, minimizing non-cutting time

Tool storage capacity : 24EA

Tool-to-tool time : 1.3sec

Max. tool dia.(adjacent empty) : 80(125)mm

Max. tool length : 300mm

Max. tool weight : 8kg



Table

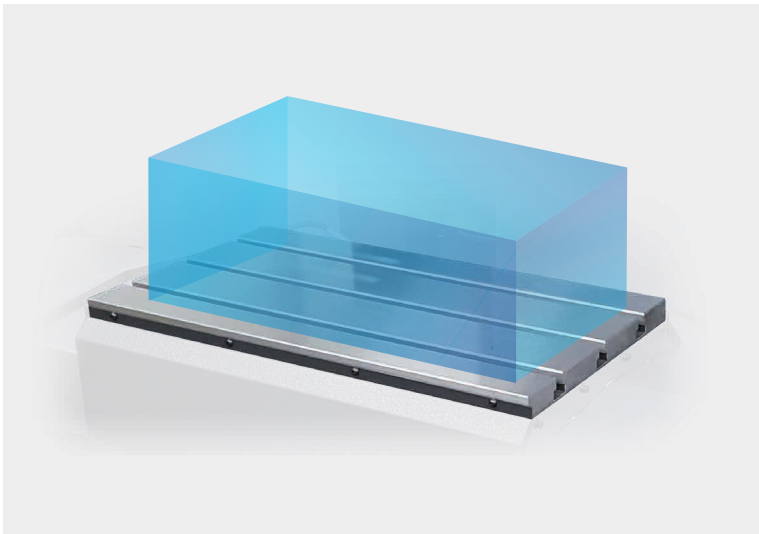



Table size and Table loading capacity were increased to support larger work area

Table size : 750×420mm

Table surface : 18H8×p125×3ea

Table loading capacity : 560kgf


3-Stage Chip Disposal

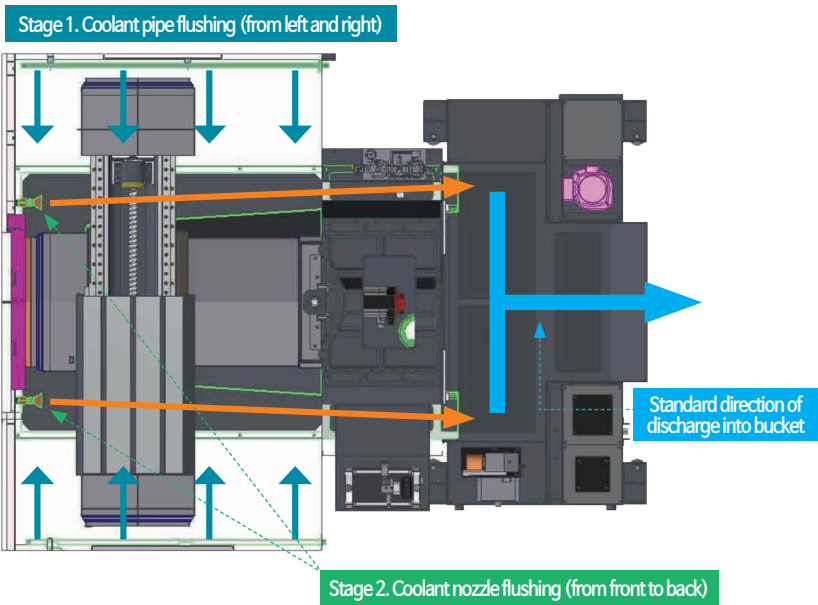

Complete chip discharge through the series of chip disposal processes by the coolant pipe, coolant nozzle and chip conveyor.

- the large, rectangular S/GUARD design and rear coolant tank ensures easy chip removal
- using bed flushing, complete chip disposal off the surface of the bed (optional, PCV 460 not available)
- the left-side lift-up chip conveyor easily removes chips away from the tank for operator convenience (optional, PCV 460 not available)

Automated Coolant Supply

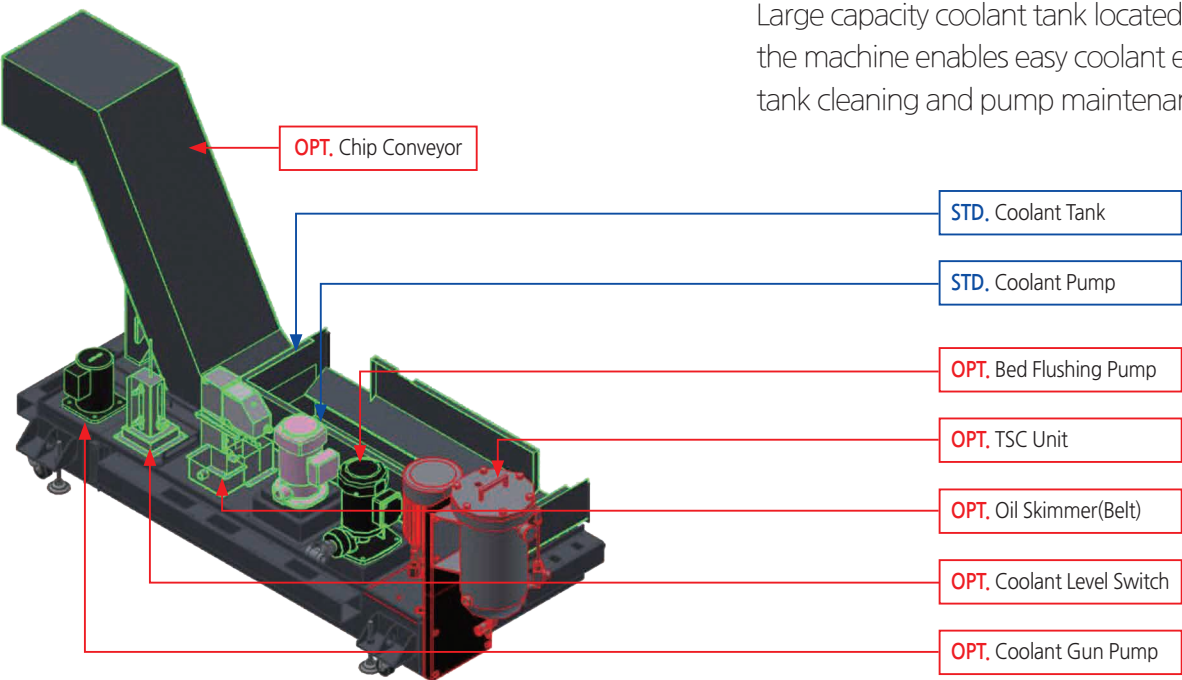

Large capacity coolant tank located behind the machine enables easy coolant exchange, tank cleaning and pump maintenance


Coolant tank capacity : 240ℓ(PCV 430)  
290ℓ(PCV 460)

Options



**Spindle oil cooler**

For long-term high speed continuous operation, an oil cooler may be installed. This system circulates cooled oil around the spindle bearings preventing spindle thermal growth and enabling high precision machining.

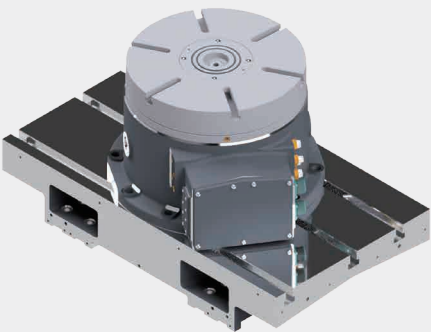

**Rotary table and air/hyd fixture preparation**

Components necessary for the installation of rotary table and fixtures may be added during assembly wherein hydraulic or pneumatic preparation may be selected.




Measurement method : Non-contact  
Repeatability : ± 0.1 μm  
Min. tool detection : 0.03mm



Measurement method : Touch probe  
Repeatability : ± 1 μm


**Tool measurement probe**

Various automated tool diameter, length and lifetime measuring devices may be installed.

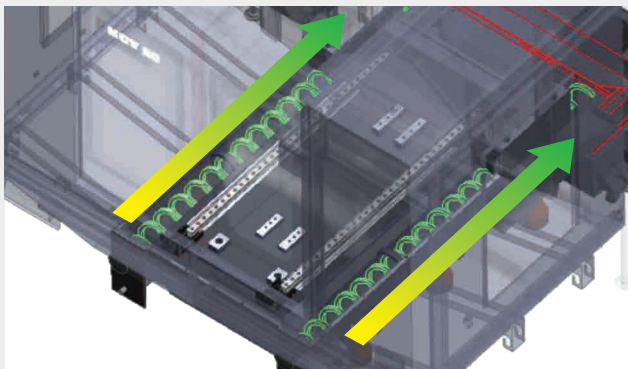


**Internal coil conveyor**

Coil conveyors may be added to enhance chip and coolant discharge

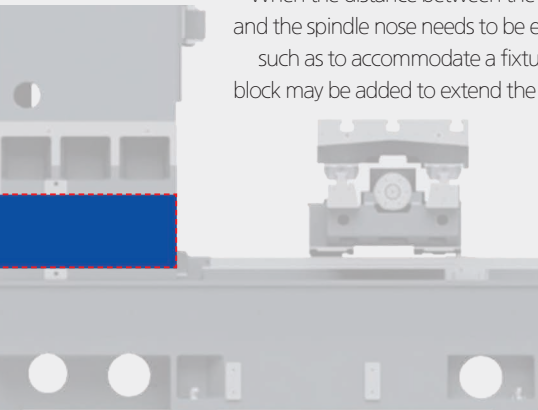

**High column**

When the distance between the table top and the spindle nose needs to be extended, such as to accommodate a fixture, a riser block may be added to extend the distance.

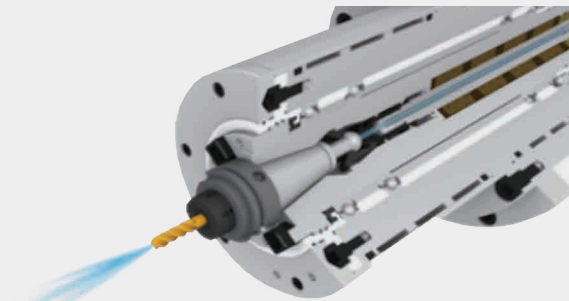


**Through spindle cooling (TSC)**

The TSC option may be added to improve machining effectiveness

Cutting performance


**Face mill (ø80mm) / Carbon steel (SM45C)**

Chip removal rate (cm³ /min)	Spindle speed (r/min)	Feedrate (mm/min)
350	1,500	1,000




**End mill (ø20mm) / Carbon steel (SM45C)**

Chip removal rate (cm³ /min)	Spindle speed (r/min)	Feedrate (mm/min)
92	2,546	1,528



**U-Drill (ø31mm) / Carbon steel (SM45C)**

절삭량 (cm³ /min)	Spindle speed (r/min)	Feedrate (mm/min)
214	1,233	284




TEST conditions : 10,000rpm [BT40 11/15(15min) / 18.5/20.4(Max)kW]

※ The above data is based on internal testing.  
Values may change depending on cutting conditions.


Tool Shank

Unit : mm

BT40/BBT40, BIG PLUS

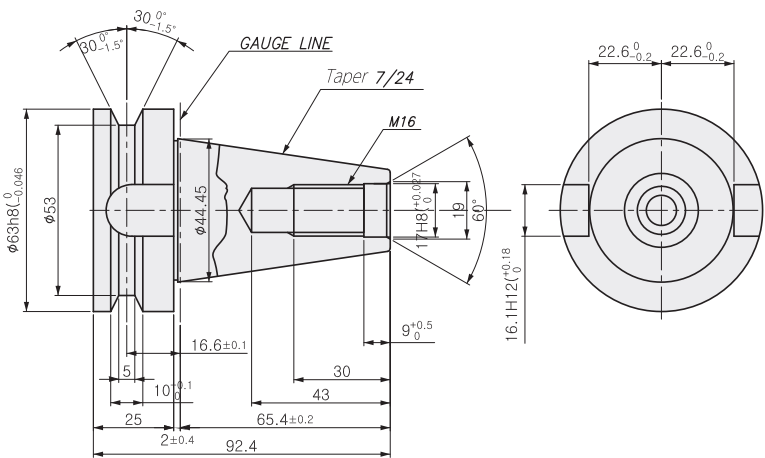

PULL STUD

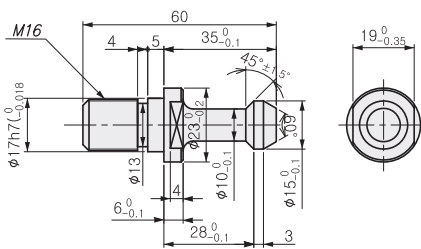


Spindle Power & Torque Diagram

10,000rpm Motor

Spindle Power(Cont/Max)  
11/20.4kW

Spindle Torque(Cont/Max)  
52.5/130N·m

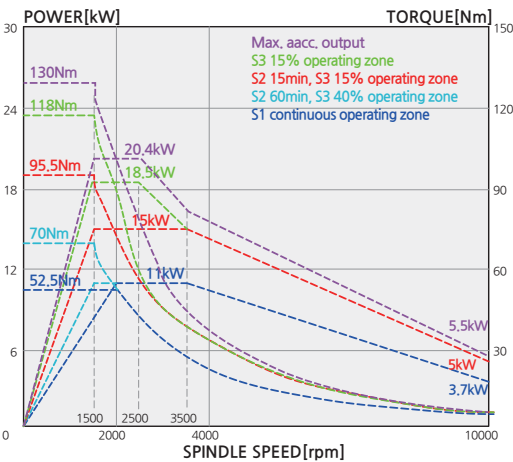

15,000rpm Motor

Spindle Power(Cont/Max)  
11/15kW

Spindle Torque(Cont/Max)  
57.3/119N·m



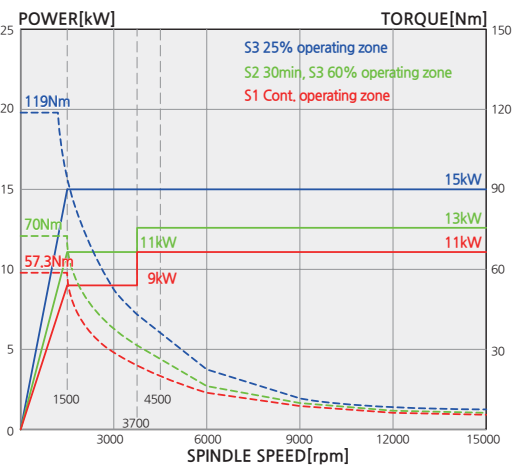




Table & T-Slot

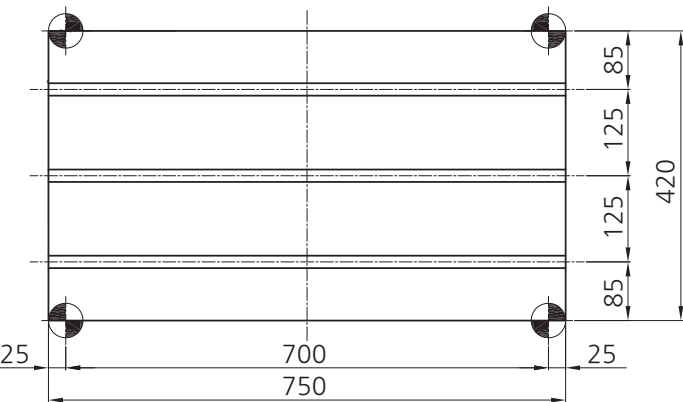



Machine Dimensions

PCV 430

Unit : mm

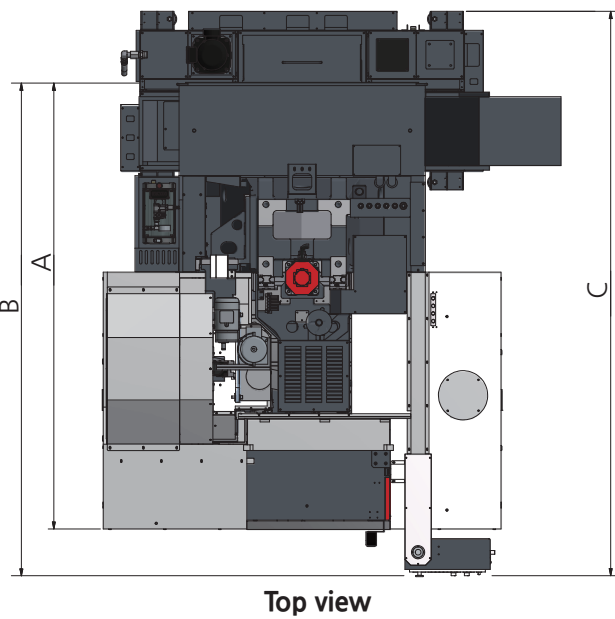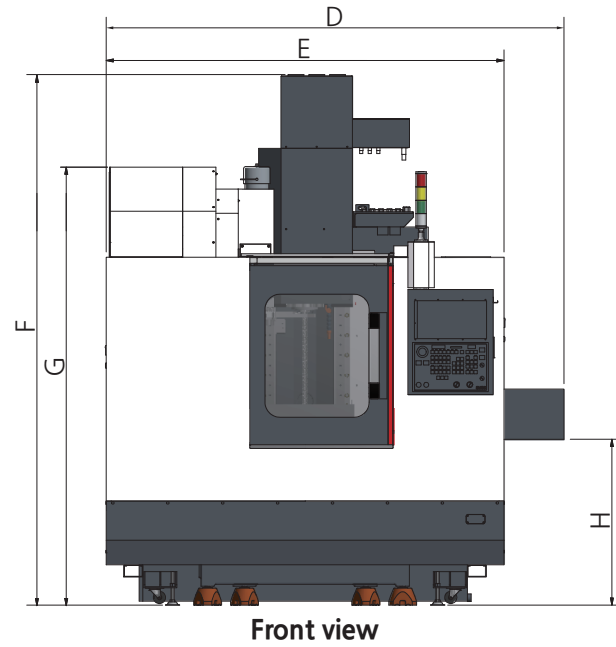

PCV 460

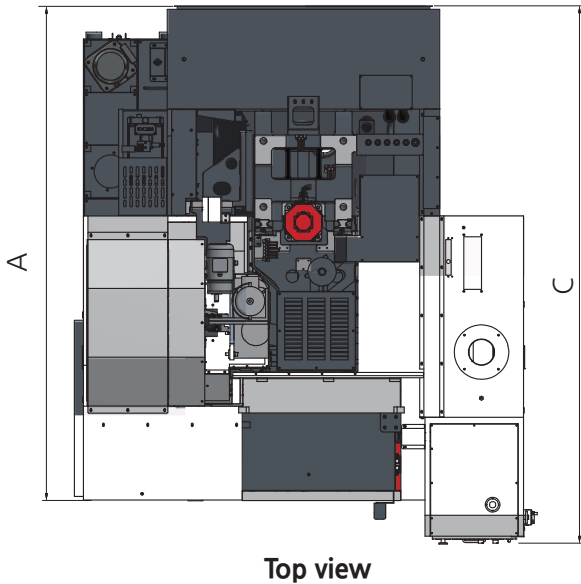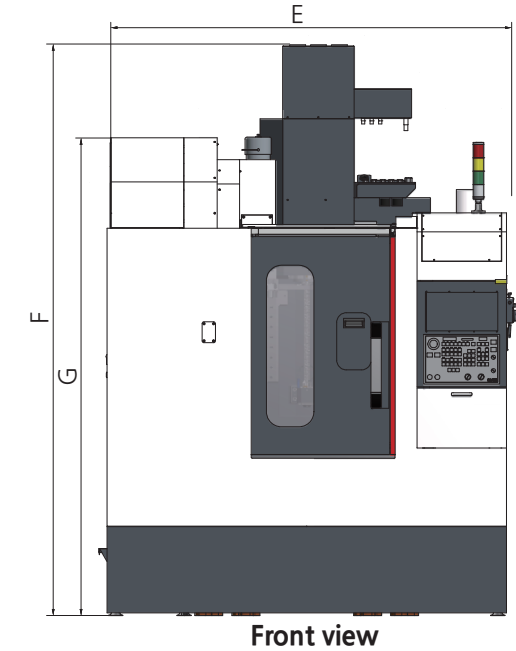

※ Chip conveyor not available for PCV 460


Model	A [Length]	B [Length (ind OP Panel)]	C [Length (max)]	D [Width (ind C/C)]	E [Width]	F [Height (max)]	G [Height (for boxing)]	H [Height of C/C discharge port]
PCV 430	2,358	2,604.5	2,979.5	2,728	2,100	2,801.5	2,329.3	876
PCV 460	2,358	-	2,563.5	X	2,100	3,001.5	2,529.3	X



Machining Solution (STD)

S4(SMEC SMOOTH SURFACE SYSTEM) Package

High performance NC options to improve machining performance provided as standard

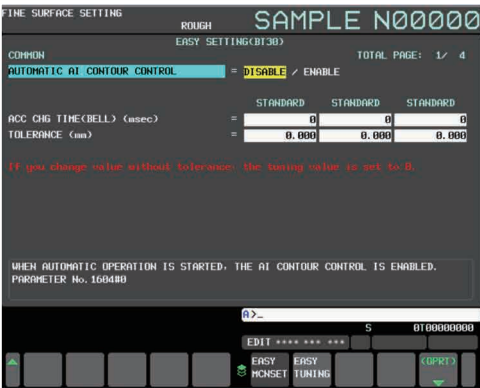

Without S4 Package



With S4 Package

10.4 inch LCD monitor standard	Screen size increased from 8.4 inch to 10.4 inch
AICC II (AI Contour Control II)	Efficient accel/deceleration (200 block look ahead)
Jerk control	Speed control during acceleration changes
Smooth tolerance plus control	Stable curved shape forming
Machining quality selection function	Adjust accuracy level according to machining conditions
Manual Guide i	Visual machining check and setup guide
Part rogram storage	2MB (5,120M)
Number of registered programs	1,000ea

IoT Solution (OPT)



NC-Gate Basic Platform



IoT-Gate Expansion Platform

NC-Gate / IoT-Gate

The NC-Gate / IoT-Gate that was developed in-house with our ICT technology is a universal gateway that not only interworks with our machine tools, but machine tools from other manufacturers, robots, automation equipment, and analog / digital sensors as a network device capable of bi-directional communication.

Supported drivers : Fanuc / Mitsubishi / Siemens NC, Modbus TCP, DeviceNet, Profibus, Ethernet, AI/DI/DO

KPI (Key Performance Indexes)



Provides key performance indicators and displays target achievement

- Indicators : achievement rate, productivity, process defect rate, equipment and factory usage, quality defect rate, lead time, and average cycle time

OEE (Overall Equipment Effectiveness)



Provides figures and graphs of overall equipment effectiveness

- Availability, performance, quality, etc.

Realtime Monitoring



Provides operation status and alarm information in case of problems in the production line

- Provides information about the operation status, speed, production alarms, etc. of each machine


Remote Control/Management



Remote control and operation

- Emergency stop switch, program editing, etc.

Remote A/S



Problem diagnosis via remote control

- Provide remote diagnosis services to users via the IoT solution


SMEC User Interface



Fanuc Oi MF Plus

- 10.4" LCD color display
- Part program size 2MB
- High quality designed OP Panel
- SMEC Custom S/W
- Portable M.P.G

SMEC Custom S/W displayed using MDI's  button or OP Panel's  button


 **CUSTOM** : Provide operator convenience and improve productivity using the support function for tool management and additional device setting.

SMEC HMI




M/G-Code check function

Allows the operator to directly read the M/G-Code on the machine for easy application programming

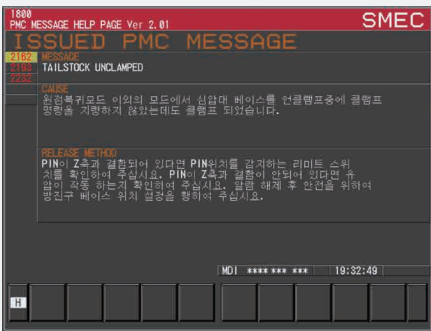


PMC alarm check function

When a PMC alarm occurs, the cause and countermeasures are described in detail, making operation and maintenance more convenient

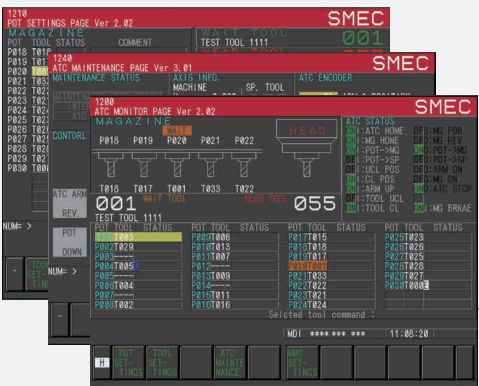

ATC Magazine status check, setting and maintenance function

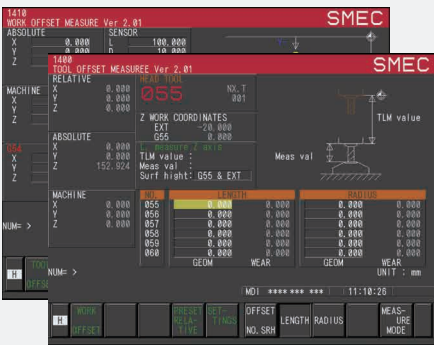

Work coordinates, tool setting support function



Counter for each T-Code



PCV 430/460

VERTICAL MACHINING CENTER

Standard / Optional

Category		PCV 430	PCV 460
Spindle			
RPM	10R	●	○
	15R	○	●
Spindle chiller		○	●
ATC			
Tool type	BBT40	●	●
	HSK-A63	X	X
	CAT40	○	○
Pull Stud		●	●
Table & Column			
APC		X	X
T-slot table		●	●
NC rotary table		○	○
High column	200mm	○	●
	300mm	○	X
	400mm	○	X
Coolant Equipment			
Top cover		X	X
Shower coolant		○	○
Coolant gun		○	○
Bed flushing		○	○
Air gun		○	○
Air blow		○	○
Tool measurement air blow (with tool measuring device)		○	○
Screw conveyor		○	○
Chip conveyor, HINGE (rear-type)	Left	○	X
	Right	○	X
	rear	X	X
Chip conveyor, SCRAPER (rear-type)	Left	○	X
	Right	○	X
Chip bucket	STD (380ℓ)	○	X
	Rotating (200ℓ)	○	X
Electrical Equipment			
3 step patrol lamp & buzzer		●	●
Elec. cabinet light		○	○
Remote MPG		○	○
3-axis MPG		●	●
Work counter	Digital	○	○
Total counter	Digital	○	○
Tool counter	Digital	○	○
Multi counter	Digital	○	○
Residual current breaker		○	○

● : Standard   ○ : Optional   X : N/A

Category		PCV 430	PCV 460
Electrical equipment			
AVR (Auto Voltage Regulator)		○	○
Transformer	50kVA	○	○
Auto power off		○	○
Power outage backup module		○	○
Z-axis drop prevention		●	●
Precision machining option			
AICC II (AI Contour Control II)		●	●
Jerk control		●	●
Smooth tolerance plus control		●	●
Machining quality selection function		●	●
Convenience			
Manual guide i		●	●
Measurement			
Workpiece contact check device	TACO	○	○
	SMC	○	○
Auto tool measuring device		○	○
Tool breakage detection		○	○
Linear scale	X-axis	○	X
	Y-axis	○	X
	Z-axis	○	X
Coolant level detection		○	○
Environmental			
Air conditioner		○	○
Oil mist collector		○	○
Oil skimmer		○	○
Fixture & automation			
Auto door	STD	○	X
	High speed	X	X
Auto shutter		X	X
Operation sub-console		○	○
NC rotary table interface		○	○
Rotary table control	1 axis	○	○
	2 axis	○	○
Add. M-code (4 sets)		○	○
Robot interface		○	○
I/O expansion		○	○
Hydraulic equipment			
Hydraulic unit for fixtures		○	○
Safety service			
Door interlock		●	●
KCs		●	●

※ For detailed information, please contact your local SMEC dealer.

Machine Specifications

[ ] : 선택

Category			PCV 430	PCV 460
Travel	X-axis travel	mm	700	700
	Y-axis travel	mm	430	460
	Z-axis travel	mm	510	510
	Spindle to table surface	mm	130 ~ 640	330 ~ 840
Table	Table size	mm	750 × 420	750 × 420
	Table loading capacity	kgf	560	560
	Table surface	mm	18H8 × p125 × 3ea	18H8 × p125 × 3ea
Spindle	Spindle speed	rpm	10,000 [15,000]	15,000
	Power (Cont/Max)	kW	11/20.4	11/15
	Torque (Cont/Max)	N.m	52.5/130	57.3/119
Feedrate	X-axis rapid traverse rate	m/min	48	48
	Y-axis rapid traverse rate	m/min	48	48
	Z-axis rapid traverse rate	m/min	36	36
	Cutting feed (X/Y/Z)	mm/min	1~15,000	1~15,000
ATC	Tool shank	-	BT 40 (BBT 40)	BT 40 (BBT 40)
	Pull stud	-	MAS P40T-1	MAS P40T-1
	Tool storage capacity	ea	24	24
	Max tool diameter (adjacent empty)	mm	80(125)	80(125)
	Max tool length / weight	mm/kg	300/8	300/8
	Tool-to-tool time	sec	1.3	1.3
	Tool changing method	mm	Double Arm Swing	Double Arm Swing
	Tool select type	mm	Memory random	Memory random
Machine	Size (with SIDE chip conveyor) L×W×H	mm	3,288 × 2,100(2,728) × 2,801.5	2,563.5 × 2,100 × 3,001.5
	Size (with REAR chip conveyor) L×W×H	mm	-	-
	Weight	kg	4,500	4,700
	Coolant tank capacity	Liter	240	290
Electric power supply		kVA/V	32/220	32/220
Controller			FANUC Oi-MF Plus	

※ Design and specifications are subject to change without notice.

NC Specification / FANUC

● : STD   ○ : Optional   ( ) : Option   X : N/A



Category		0i-MF Plus
Controlled axis	Controlled axes	X, Y, Z
	Max simultaneously controlled axes	4
	Least input increment	0.001mm / 0.0001"
	Built-in stroke limit	Soft overtravel 1, 2, 3
	Machine lock	●
Operation function	Manual handle feed	X1, X10, X100
	Dry run	●
	Single block	●
	Feed per minute	G94
	Feed per revolution	G95
	DNC operation	Ethernet, CF card
	Retraction for rigid tapping	●
Interpolation function	Linear interpolation	G01
	Circular interpolation	G02, G03
	Dwell	G04
	Cylindrical interpolation	G70.1
	Skip	G31
	Fine surface machining	●
	Smooth tolerance control	●
	Nano smoothing	X
	Polar coordinate interpolation	X
	Reference position (zero) return	G28
	Reference position (zero) return check	G27
	2nd, 3rd, 4th reference point return	G30
Feed function	Rapid traverse override	F0, 25%, 50%, 100%
	Feedrate override	0~200%
	Jog override	0 ~ 5,000 mm/min
	AI look ahead	20 block
	AI contour control II	200 block
	Look ahead block expansion (F0i)	OPT(400 block)
	High-speed processing	X
	Look ahead block expansion (F31i)	X
	Jerk Control	●
Spindle function	Spindle orientation	●
	Rigid tapping	M29
	Spindle override	50 ~ 150%
Tool function	Tool number command	T2-Digt Tool number
	Tool nose radius compensation	G40 ~ G42
	Tool offset pairs	400 pairs
	Tool geometry / wear offset	●
	Tool length offset	●
	Tool life management	●
	Tool path graphic display	●

NC Specification / FANUC

● : STD   ○ : Optional   ( ) : Option   X : N/A



Category		0i-MF Plus
Program input	Absolute / incremental command	G90/G91
	Repeating canned cycle	X
	Repeating canned cycle 2	X
	Canned cycles	X
	Drilling canned cycle	G73/74/76, G80~89
	Decimal point input	●
	Inch / metric conversion	G20 / G21
	Program restart	●
	Sub program call	●
	Max programmable value	±99999.999mm/±9999.9999"
	M function	3 digit
	Custom macro	●
	Addition of custom macro common variables	#100~#199, #500~#999 (#98000~#98499)
	Programmable data input	G10
	Tape code	ISO / EIA
	Optional block skip	●
	Workpiece coordinate system	G52 ~ G59
	Addition of workpiece coordinate system	48(300) pairs
Interface function	Embedded ethernet	●
	Fast ethernet	100 Mbps
Setting and display	Alarm and operator history display	●
	Run hour and parts count display	●
	Loadmeter display	●
	Self diagnosis function	●
	Extended part program editing	●
	Machining condition selecting function	●
	Machining quality level adjustment	●
	Display screen	10.4" color LCD
	Multi-language display	25 language
Data input/output	Fast data server	○
	RS232C interface	●
	Memory card input / output	●
Editing operation	USB memory input / output	●
	Part program storage size	2MB
	Number of registered programs	1,000EA
	Manual guide 0i	○
	Manual guide i	○